

METRO PANEL

TECHNICAL DATA SHEET




Metro is a high-strength panel offering 36" coverage, featuring uniformly spaced ribs at 7.2" on center. This exposed fastener panel is suitable for exterior wall, interior liner, and soffit applications, and the side laps are positioned in the low cell.


- Panel Length**
Standard: 5' - 38'
- Panel Width**
36"
- Panel Depth**
1 1/2"
- Surface Finish**
Standard: Smooth
- Substrates**
Standard: 24 & 26 gauge
G-90 Galvanized Steel

DESIGN FEATURES & BENEFITS

- Traditional ribbed profile with even spacing throughout
- Versatile design for a wide range of applications
- All-weather installation capability
- Exceptional negative wind load properties
- Excellent option for new construction and retrofit projects

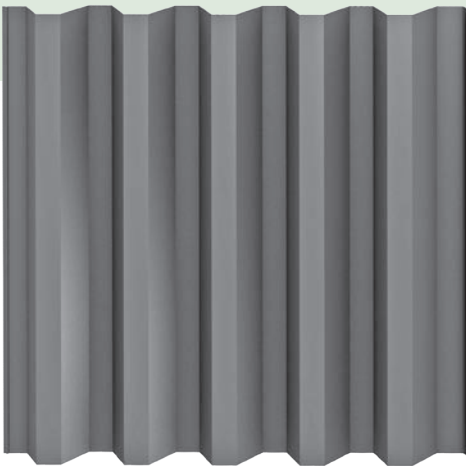

METRO PANEL PROFILE

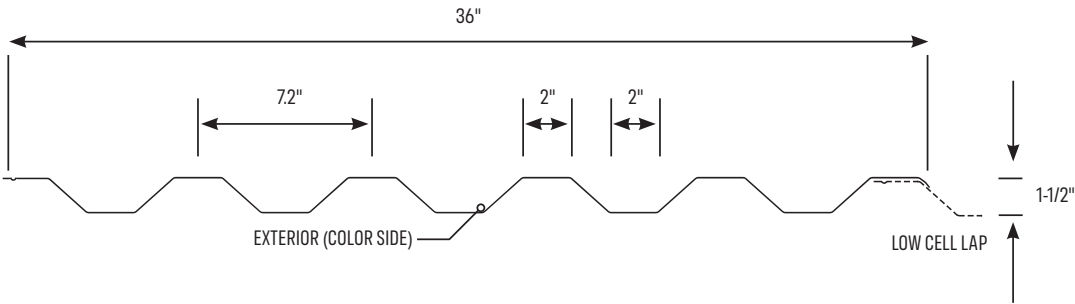

TESTING

TEST	CHARACTERISTIC	TEST TITLE	RESULTS
 Structural	Florida Product Approval	Determines whether a product used as external protection to maintain a building envelope provides sufficient resistance to design wind pressures using Florida Building Code safety factors.	FL1754 for non-HVHZ applications (24 ga. only)



Scan code to view
our color offerings.